



SOL-1503

FEATURES

- Ultra-narrow 22mm joins for seamless linear skylight installations.
- 24-hour circadian lighting simulation following natural daylight cycles.
- Sunlight-spectrum illumination with high colour accuracy and visual comfort.
- 1503E: 30° angled sunlight beam. 1503W: Uniform wall washer effect.
- Modular design allows continuous skylight features across large spaces.
- DALI, app and control panel compatible for flexible lighting control.
- Premium aluminium and tempered glass construction for long-term reliability.

APPLICATIONS

Ideal for:

- Offices & Boardrooms
- Retail & Showrooms
- Residential Interiors
- Museums & Galleries
- Feature Walls & Stone
- Surfaces Windowless & Enclosed Spaces



BLUE SKY

Basic Parameters	Details
Dimming Range	0-100%
Shell Material	Aluminium Alloy
Surface Material	Tempered Glass
Weight	16.4kg
IP	20 / IP54
Sol Size	1481*270*116mm
Hole Size	1496*282mm
Ceiling Height	>200mm
Power	92W
Voltage	90-277V AC
CCT	2500-10,000K
CRI	98
Light Tilt	E: 30° W: Wall Washer
Lifetime	50,000H
Sky Effect	Blue Sky
Control Method	APP Panel DALI
Lux at 3m	4000-4500lx
Mounting	Recess / Suspended
Shape	Rectangle
Frame Finish	White
Warranty	5 years
Standard Lead Time	4 to 6 weeks

Photometric & Vector Files

[Download IES, LTD and Vector files](#)

Ceiling Height (m)	Sol-1503 (Lux)
3	4000-4500
5	2000-2500
8	1000-1500
10	800-900
12	500-600
15	300-400

Product Ordering

PRODUCT CODE	PRODUCT TYPE	ACCESSORIES
SOL-1503-B-E	Blue Sky, 30° tilt sunshine	Control panel, DALI driver
SOL-1503-B-W	Blue Sky, Wall Washer	Control panel, DALI driver

WATCH PRODUCT EXPLANATION VIDEO



SOLLUX
SKYLIGHTING



solluxskylighting.com




hello@solluxskylighting.com




07 2112 6261


DIMENSIONS





SOL-1503W




SOL-1503E

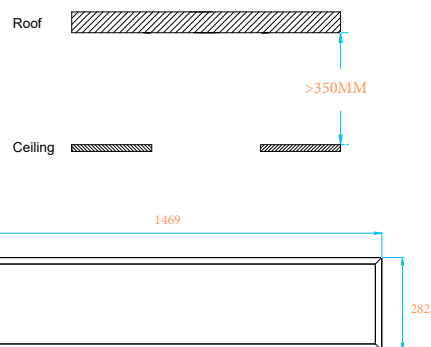

MOUNTING OPTIONS



SOL-1503-B-E



SOL-1503-B-W

ACCESSORIES



AC DRIVER & ANTENNA



CONTROL DRIVER



CONTROL PANEL

CIRCUIT DIAGRAM

