

SOL-0603




FEATURES

- Provides hyper realistic sunlight effect without ceiling penetrations.
- Compact design for smaller spaces where a full-size skylight is not practical.
- True Blue-Sky illumination creates the appearance of natural daylight indoors.
- Sunlight-spectrum technology = high colour accuracy and visual comfort.
- DALI, app and control panel compatibility for flexible lighting control.
- Lightweight design allows easy integration into a wide range of ceiling types.
- Ideal as a standalone feature or as part of a multi-skylight arrangement. Premium aluminium construction for long-term durability and reliability.

APPLICATIONS

- Feature gallery lighting
- Residential feature ceilings
- Hotels and hospitality venues
- Wellness centres and spas
- Retail stores and showrooms
- Commercial reception areas
- Museums and exhibition spaces
- Hospitals, clinics and aged care

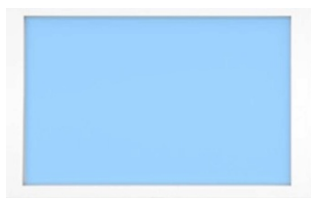


BLUE SKY


SPECIFICATIONS

Basic Parameters	Details
Power	48W
Voltage	90-277V AC
CCT	2500-10000K
Lux at 3m	4000-5000lx
CRI	98
Beam Angle	90°
Lifetime	50,000H
Sky Effect	Blue Sky
Control Method	APP Panel DALI
IP	20 / 54
Weight	4.5kg
Mounting	Surface / Recess / Suspended
Operating Temp.	-20~40°C
Shape	Rectangle
Shell Material	Aluminium Alloy
Frame Finish	White
Surface Material	Tempered Glass
Sol Size	570 x 274 x 73mm
Sky Size	460 x 226mm
Hole Size	595 x 295mm
Ceiling Cavity	>200mm
Front Frame Size	600 x 300 x 8mm
Warranty	5 years
Standard Lead Time	4 to 6 weeks

LIGHT MODES



Turn on the Sky light



Turn on Sky light and Sun light

PRODUCT ORDERING

PRODUCT CODE	PRODUCT TYPE	ACCESSORIES
SOL-0603-B	BLUE SKY	Control panel, DALI driver

Photometric & Vector Files

[Download IES, LTD and Vector files](#)

WATCH PRODUCT EXPLANATION VIDEO



solluxskylighting.com




hello@solluxskylighting.com




07 2112 6261

DIMENSIONS

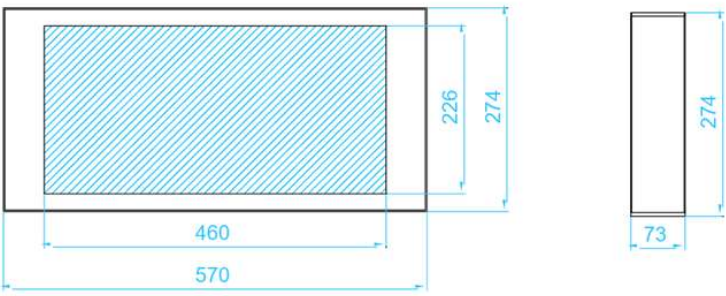

MOUNTING OPTIONS

RECESSED INSTALLATION

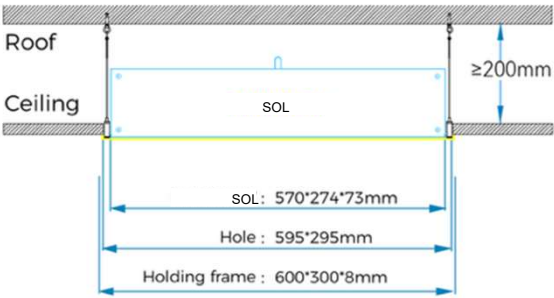

ACCESSORIES



AC DRIVER & ANTENNA




CONTROL DRIVER



CONTROL PANEL

CIRCUIT DIAGRAM

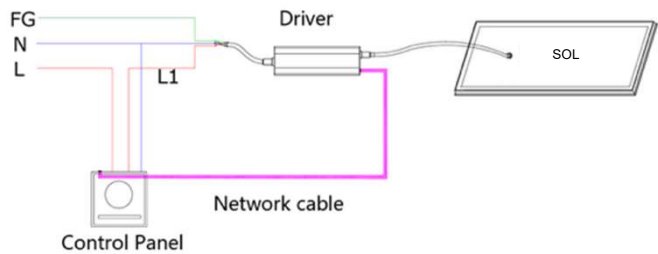

Notes

- L (live wire)
- N (neutral wire)
- FG (GND)
- HDMI cable
- Network cable