

SOL-1212

FEATURES

- Seamless multi-panel installation for large-scale sky features.
- Dynamic sky simulation, static cloud, or blue-sky panels available.
- Large sky aperture with ultra-narrow architectural frame design.
- 24-hour circadian lighting simulation following natural daylight cycles.
- Sunlight-spectrum illumination with CRI up to 98.
- Premium aluminium and tempered glass construction for long-term reliability.

APPLICATIONS

Ideal for:

- Residential Living
- Offices & Boardrooms
- Healthcare & Aged Care
- Hotels, Spas & Wellness
- Retail Showrooms
- Commercial Lobbies
- Underground Areas



MOVING CLOUDS



BLUE SKY



STARRY NIGHT

Basic Parameters	Details
Power	415W
Voltage	90-277V AC
CCT	2500-10000K
CRI	98
Beam Angle	90°
Lifetime	50,000H
Sky Effect	Blue Sky / Dynamic / Dynamic + Star
Control Method	APP Panel DALI
Dimming Range	0-100%
IP	20 / 54
Weight	40kg
Mounting	Surface / Recess / Suspended
Shape	Square
Shell Material	Aluminium Alloy
Frame Finish	White
Surface Material	Tempered Glass
Sol Size	1170*1170*121mm
Hole Size	1195*1195mm
Ceiling Cavity	>200mm
Warranty	5 years
Standard Lead Time	4 to 6 weeks

Photometric & Vector Files

[Download IES, LTD and Vector files](#)

Ceiling Height (m)	Sol-1212 (Lux)
3	3000-4000
5	2000-3000
8	1000-2000
10	1000-1500
12	700-800
15	500-600

Product Ordering

PRODUCT CODE	PRODUCT TYPE	ACCESSORIES
SOL-1212-D-N	DYNAMIC + NIGHT	Video processor, control panel, DALI driver
SOL-1212-D	MOVING CLOUDS	Video processor, control panel, DALI driver

WATCH PRODUCT EXPLANATION VIDEO




SOLLUX
SKYLIGHTING

 solluxskylighting.com


 hello@solluxskylighting.com

 07 2112 6261

DIMENSIONS

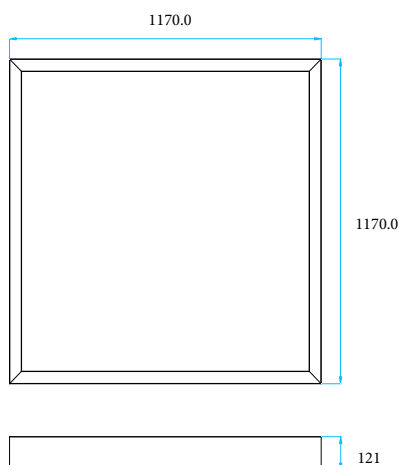


CIRCUIT DIAGRAM

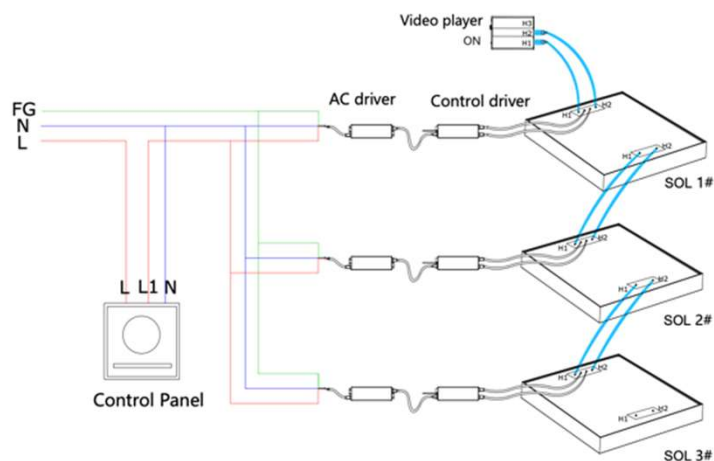

MOUNTING OPTIONS

RECESSED INSTALLATION

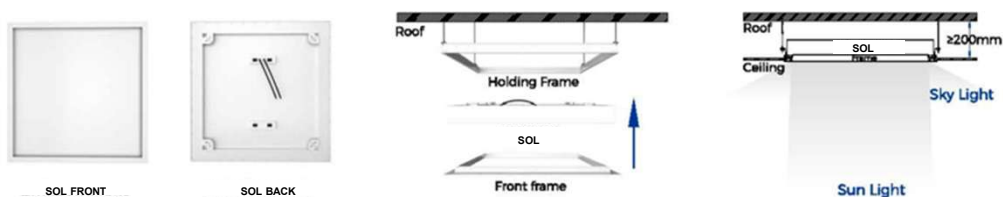

ACCESSORIES

